

TRIBO 2T TC HYPERMAX A universal high-quality synthetic-based engine oil for modern high-load and high-speed 2-stroke engines with air and liquid cooling. It is suitable for the lubrication by a pre-mixed blend and an automatic mixing in an engine intake.

PRODUCT PROPERTIES:

- A modern additive package and a synthetic base ensure a stable operation of the engine in any operating conditions, including high temperatures and loads, prevent the formation of carbon deposits, lacquer and soot on combustion chamber walls, pistons, plugs, valves, an exhaust manifold and exhaust pipe, prevent piston rings from sticking and gumming up thus extending the service life of the engine.
- A special oil formula ensures a full and smokeless combustion and prevents preignition.
- Special ashless detergent additives maintain the engine parts clean.
- It instantly forms a highly stable mixture with all types of fuel even at low temperatures.
- It has excellent anticorrosion, antiwear and antifriction properties, prevents wear and scuffing on cylinder walls even under extreme loads.
- It is suitable for motorsports.

It is designed for use in all types of modern 2-stroke engines: motorcycles, mopeds, scooters, motor scooters and other two-wheeled motor vehicles with the required oil level of API TC and JASO FD.

The fuel-oil mixture ratio recommended by engine manufacturers must be observed. In the absence of it - the recommended ratio is 1:50.

Comply with the manufacturer's instructions provided in the user's manual of the engine!

It is dyed red for the visual control of the oil in the mixture.

PRODUCT SPECIFICATIONS 2T

SAE GRADE	2T
API GRADE	TC
COLOR	BLUE
DENSITY @ 20°C	0.875
VISCOSITY @ 40°C	60.3
VISCOSITY @ 100°C	8.2
VISCOSITY INDEX	152
FLASH POINT	95
POUR POINT	-39

CREDENTIAL & SPECIFICATIONS

API TC, JASO FD, ISO L-EGD, TISI




TOWARDS NEW HORIZON

HYPERMAX

TWO STROKES

2T

API TC

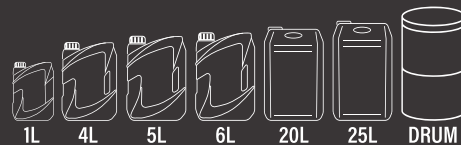

AVAILABLE PACKAGING

*Information and figures given herein are typical of current production and conform to specifications, slight variations may occur.

