



TOWARDS NEW HORIZON

HYPERMAX

FULLY SYNTHETIC

5W-30

API SN
ILSAC GF-5

TRIBO 5W-30 HYPERMAX Innovative, energy-saving ester-containing fully synthetic premium engine oil for modern gasoline engines. Designed in accordance with the requirements of American, Japanese and Korean automakers specifically for engines with direct injection systems (GDI, D4, NEO-DI, CGI DISI, I-CDTI), turbocharged.

PRODUCT PROPERTIES:

- High fuel efficiency due to reduced viscosity and optimal anti-friction properties.
- Highly effective additive package and synthetic base provide confident cold start in any conditions, thereby significantly reducing engine starting wear.
- Due to its excellent washing and dispersing properties and the highest thermal oxidative stability, it effectively fights against all types of deposits and keeps engine parts clean throughout the entire interval between replacements. - The presence of ester components in combination with optimal viscosity- temperature characteristics guarantees the highest strength of the oil film, which provides excellent anti-wear properties which, combined with excellent pumpability, significantly increase engine life even in the most severe operating conditions.
- Compatible with the latest exhaust gas aftertreatment systems.
- A special synthetic base optimizes the operation of engines with direct injection systems, with turbocharging, as well as with various mechanisms for changing the valve timing (VTEC, i-VTEC, VVT-i, VVTL-i, CVVT, VVL, MIVEC, AVCS (AVLS), CVTCS and others.)
- It is used in engines with extended oil change intervals (Long Life) and conventional.

Designed for multi-valve gasoline engines of cars, light SUVs, vans and light trucks, as well as SUV cars and light-duty vans, where the performance level API SN / ILSAC GF-5 of this viscosity class is required.


PRODUCT SPECIFICATIONS SAE 5W30

SAE GRADE	5W30
API GRADE	SN
DENSITY @ 20°C	0.848
VISCOSITY @ 40°C	66.2
VISCOSITY @ 100°C	11.2
VISCOSITY INDEX	161
FLASH POINT	224
POUR POINT	-42
TBN	7.7

CREDENTIAL & SPECIFICATIONS

GM DEXOS1 GEN2, FORD WSS-M2C929-A, FORD WSS-M2C946-A, FORD WSS-M2C946-B1, FIAT 9.55535-CRI, HONDA HTO-06, GM 6094M, CHRYSLER MS-6395, CHRYSLER MS-13340, LEXUS, MAZDA, SUZUKI, SSANGYONG

*Information and figures given herein are typical of current production and conform to specifications, slight variations may occur.

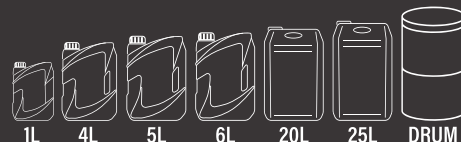

AVAILABLE PACKAGING

