

TRIBO ATF DEX-VI HYPERMAX is a low viscosity, high performance synthetic transmission fluid that meets GM Dexron VI, Ford Mercon LV and JASO 1-A LV specifications.

PRODUCT PROPERTIES:

- It is used in automatic transmissions and power steering systems of passenger cars and commercial vehicles where GM Dexron VI, Ford Mercon LV and JASO 1-A LV are required.
- It is also suitable for use in hydraulic power systems where an automatic transmission fluid is specified.
- Low viscosity formula provides fuel efficiency
- It reduces maintenance costs and extends automatic transmission's life at low temperatures and under extreme road conditions while providing excellent protection against wear
- Reduces friction and heat, so provides smooth gear shift over wide operating temperature range.
- Superior oxidation stability and shear stability.



TOWARDS NEW HORIZON

HYPERMAX

SYNTHETIC FORMULA

ATF


DEX-VI

PRODUCT SPECIFICATIONS DEX-VI

SAE GRADE	DEX-VI
COLOUR	RED
DENSITY @15°C	0.841
VISCOSITY @ 40°C	28.6
VISCOSITY @100°C	5.9
VISCOSITY INDEX	162
FLASH POINT	212
POUR POINT	-42

CREDENTIAL & SPECIFICATIONS

GM DEXRON VI, FORD MERCON LV, JASO 1-A LV

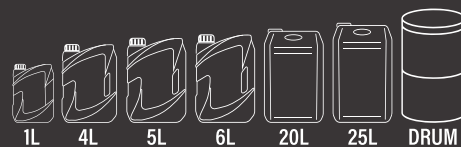

*Information and figures given herein are typical of current production and conform to specifications, slight variations may occur.

