



TOWARDS NEW HORIZON

TRIBO ATF DEX-II HYPERMAX is a universal all-season mineral-based transmission fluid (ATF) for automatic gearboxes, hydraulic power steering systems, cab tilt mechanisms, car hydraulic clutches and other hydraulic devices, including the ones operating under heavy-duty conditions in trucks and off-road vehicles. It ensures a flawless operation of an automatic gearbox, guarantees minimal wear, a lasting service life of transmissions and fuel economy. It was developed on the basis of the requirements set by the GM group.

**PRODUCT PROPERTIES:**

- The high-quality low-viscosity base in combination with a multifunctional additive package preserves all its properties in a wide range of temperatures: it ensures good lubricating properties at low (-45°C) temperatures in winter and ensures a stable oil film under extreme loads and at high temperatures in summer.
- The high-technology combination of additives ensures good antifriction properties for gear couplings and required friction properties for friction elements thus ensuring a significant fuel economy, a continuous and smooth transmission shift and an extended service life of all transmission elements. It prevents scuffing.
- It has an increased thermal-oxidative stability and resistance to the high-temperature thermal degradation allowing decreasing the sludge formation, increasing the time between oil changes and reducing equipment maintenance costs.
- It protects metal parts from ferrous and non-ferrous alloys from corrosion when both in and not in operation.
- It effectively resists aeration and foam formation.
- It provides a compatibility with sealing materials, prevents them from swelling, hardening and shrinking that allows reducing the costs for spare parts and prevents leakages.
- It reduces noise.

It is recommended for automatic gearboxes of passenger cars and commercial vehicles requiring the oil of ATF Type Dexron-IID quality, it is mixed with brands of similar quality. Comply with the manufacturer's instructions provided in the user's manual!

# HYPERMAX

**SYNTHETIC FORMULA**

# ATF


**DEX-II**

### PRODUCT SPECIFICATIONS DEX-II

SAE GRADE	DEX-II
COLOR	RED
DENSITY @ 15°C	0.87
VISCOSITY @ 40°C	41
VISCOSITY @100°C	7.8
VISCOSITY INDEX	165
FLASH POINT	216
POUR POINT	-42

### CREDENTIAL & SPECIFICATIONS

API CF-4, ACEA E2 A2/B2, MB 228.3, MACK EO-N, MAN 3275-1, VOLVO VDS-3, RVI RLD/RLD-2, GLOBAL DHD-1, DEUTZ DQC II-10, DETROIT DIESEL 93K215, CAT ECF-1-A/CAT ECF-2 CUMMINS 20076/20077/20078

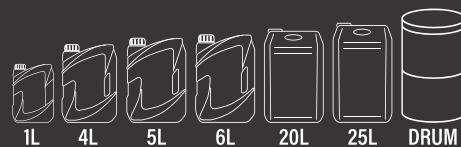

AVAILABLE PACKAGING

\*Information and figures given herein are typical of current production and conform to specifications, slight variations may occur.

